

## Product Specification


### General Purpose Yellow EL Wire – Model 01S Y2

For Indoor and Outdoor\* Use

#### Specific Characteristics


#### Typical\*\* Chromaticity Coordinates

Voltage/Frequency	Chromaticity Coordinates	
	X	Y
100 V / 400 Hz	0.498	0.498
100 V / 800 Hz	0.499	0.497
100 V / 2000 Hz	0.500	0.495

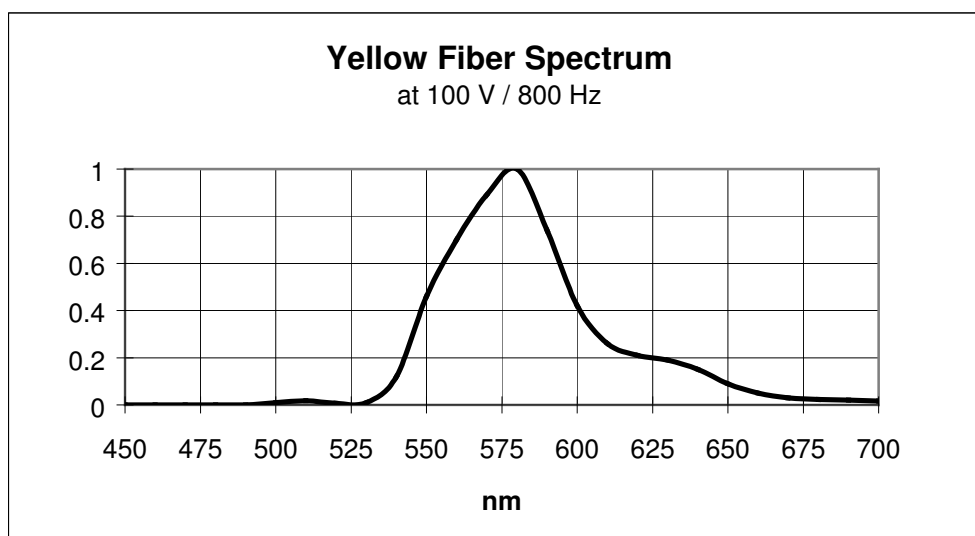

### Typical\*\* Initial Reference Brightness\*\*\* (cd/msq)

Voltage, VRMS	200 Hz	400 Hz	800 Hz	2000 Hz	4000 Hz
40	0.5	1.0	1.5	2.3	3.4
60	3.6	6.8	10.4	18.2	23.9
80	9.8	17.9	29.3	53.6	78.3
100	18.9	33.2	56.4	107.4	158.7
120	32.6	52.4	86.3	167.5	249.0

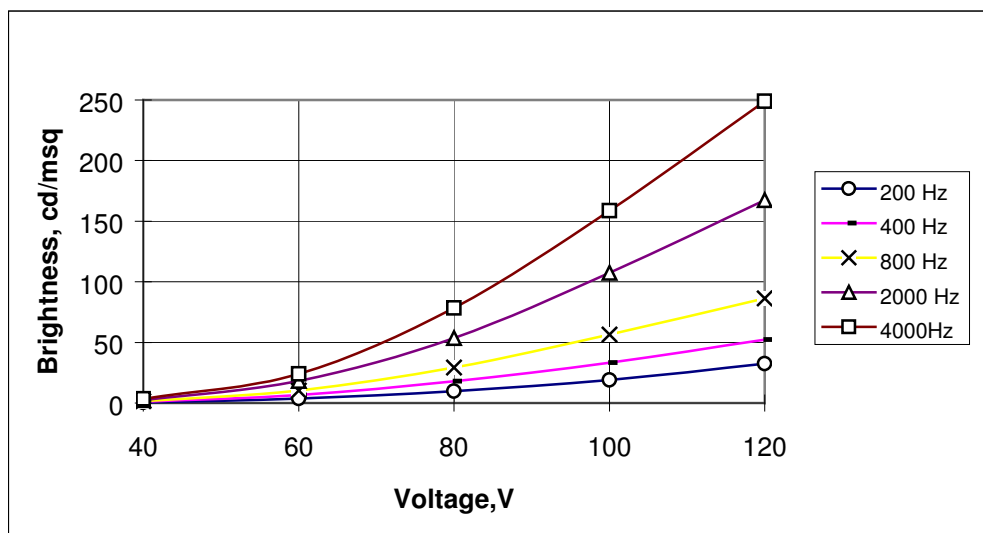

\* Remark: Product operation under direct sunlight is not recommended!  
For Outdoors system design, please, contact ELAM Technical Support for additional information.

\*\* Remark: Actual parameters of each lot may vary from typical values within +/-20%. All parameters shown for room conditions.

\*\*\* Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.7 mm.