


**Preliminary  
Product Specification  
Mini Pink EL Wire – Model 01C S1**

**Specific characteristics\***


**Typical\*\* Chromaticity Coordinates**

<b>Voltage/Frequency</b>	<b>Chromaticity Coordinates</b>	
	<b>X</b>	<b>Y</b>
100 V / 400 Hz	0.413	0.287
<b>100 V / 800 Hz</b>	0.392	0.268
100 V / 2000 Hz	0.352	0.228

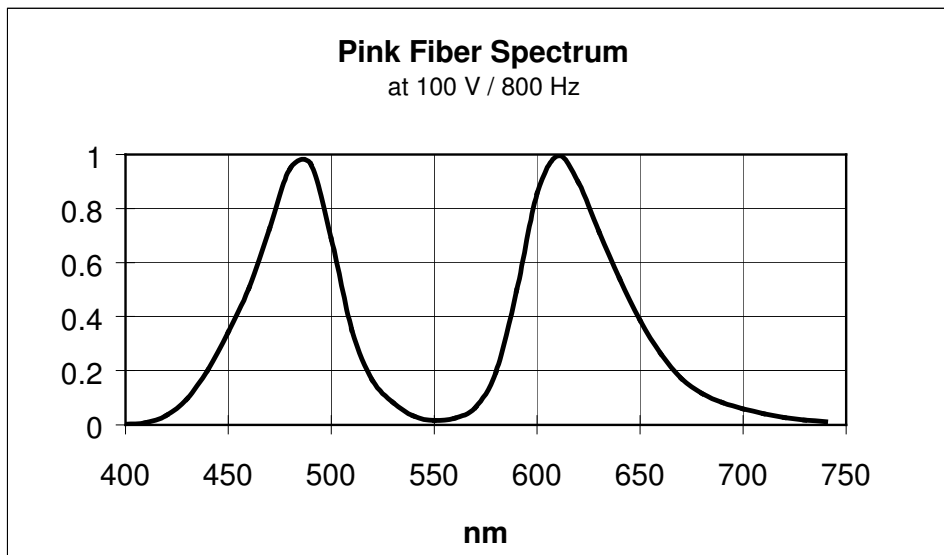

**Typical\*\* Initial Reference Brightness\*\*\* (nit)**

Voltage, VRMS	200 Hz	400 Hz	800 Hz	2000 Hz	4000 Hz
40	0.2	0.4	0.6	0.9	1.3
60	0.9	1.6	2.6	4.5	6.5
80	2.1	3.7	6.3	11.0	15.7
100	3.6	6.6	11.1	19.5	28.2
120	5.5	9.7	16.7	29.7	42.1

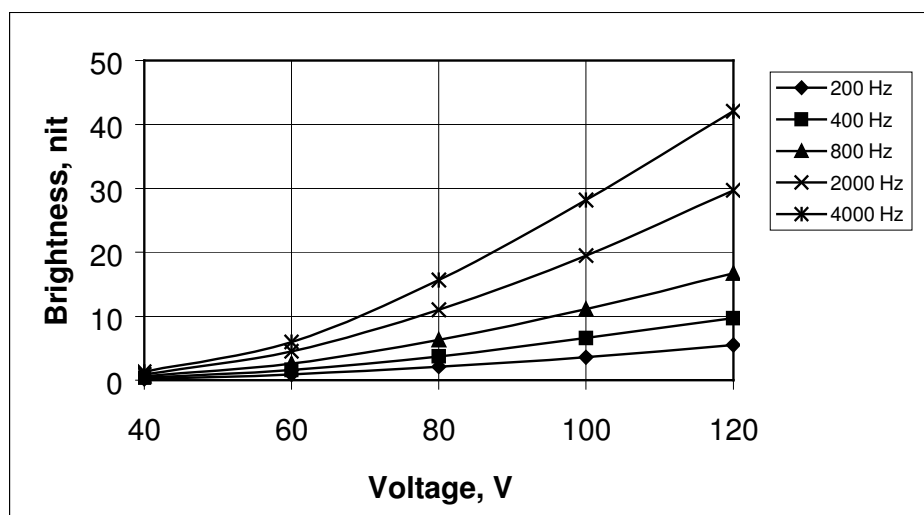

\* Remark: Product intended for indoor use.

\*\* Remark: Actual parameters of each lot may vary from typical values within +/-20%. All parameters shown for room conditions.

\*\*\* Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.6 mm.



**ELAM Ltd**

P.O.B. 45071, Jerusalem 91450, Israel

Phone: 972-2-532-8888

Fax: 972-2-532-8889