



ELAM Ltd
P.O.B. 45071, Jerusalem 91450, Israel
Phone: 972-2-532-8888
Fax: 972-2-532-8889

Product Specification


Heavy Duty Lime EL Wire – Model 02S L3

For Indoor and Outdoor* Use

Specific Characteristics


Typical Chromaticity Coordinates**

Voltage/Frequency	Chromaticity Coordinates	
	X	Y
100 V / 400 Hz	0.248	0.680
100 V / 800 Hz	0.248	0.680
100 V / 2000 Hz	0.247	0.674

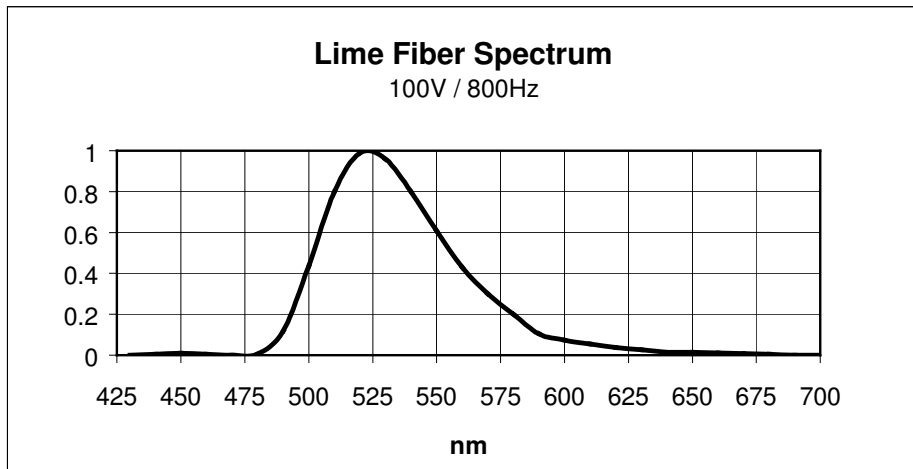

Typical Initial Reference Brightness*** (cd/msq)**

Voltage, VRMS	200 Hz	400 Hz	800 Hz	2000 Hz	4000 Hz
40	0.7	1.0	1.7	3.0	4.0
60	4.4	6.0	11.3	20.6	28.4
80	11.6	19.9	31.8	57.2	82.6
100	22.2	36.5	61.8	112.6	170.3
120	34.2	57.2	98.8	191.1	277.0

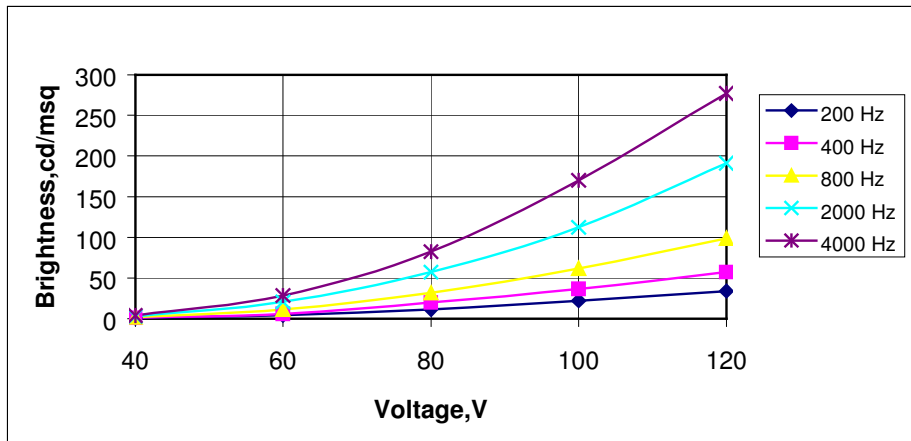

* Remark: Product operation under direct sunlight is not recommended!
For Outdoors system design, please, contact ELAM Technical Support for additional information.

** Remark: Actual parameters of each lot may vary from typical values within +/-20%. All parameters shown for room conditions.

*** Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.7 mm.



ELAM Ltd

P.O.B. 45071, Jerusalem 91450, Israel

Phone: 972-2-532-8888

Fax: 972-2-532-8889