


Product Specification
Heavy Duty Orange EL Wire – Model 02S O3
For Indoor and Outdoor* Use
Specific Characteristics


Typical Chromaticity Coordinates**

Voltage/Frequency	Chromaticity Coordinates	
	X	Y
100 V / 400 Hz	0.629	0.360
100 V / 800 Hz	0.636	0.360
100 V / 2000 Hz	0.638	0.358

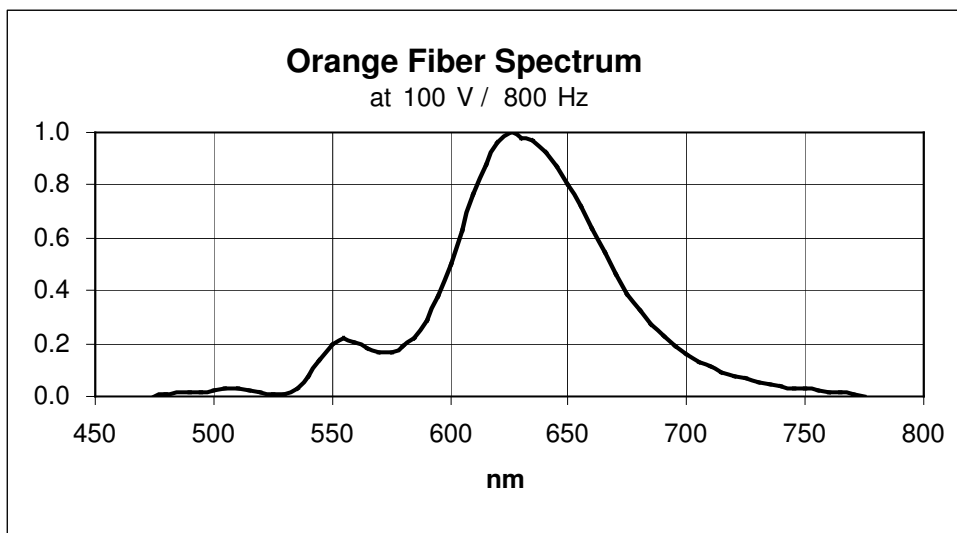

Typical Initial Reference Brightness*** (cd/msq)**

Voltage, VRMS	200 Hz	400 Hz	800 Hz	2000 Hz	4000 Hz
40	0.3	0.4	0.6	1.0	1.5
60	1.0	2.1	3.3	5.9	9.0
80	3.4	5.7	9.4	17.1	24.8
100	6.2	10.3	18.6	32.6	42.6
120	9.2	15.8	27.5	51.2	74.2

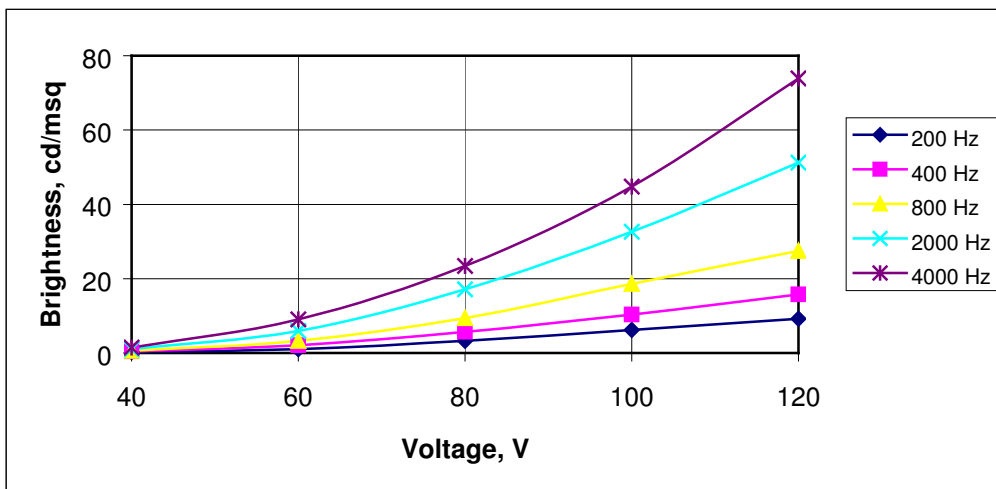

* Remark: Product operation under direct sunlight is not recommended!
For Outdoors system design, please, contact ELAM Technical Support for additional information.

** Remark: Actual parameters of each lot may vary from typical values within +/-20%. All parameters shown for room conditions.

*** Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.7 mm.