


**Preliminary
Product Specification
Hi-Bright Purple EL Wire – Model 48S P1**

*Specific characteristics**


Typical Chromaticity Coordinates**

Voltage/Frequency	Chromaticity Coordinates	
	X	Y
80 V / 400 Hz	0.337	0.214
80 V / 800 Hz	0.311	0.183
80 V / 2000 Hz	0.267	0.146

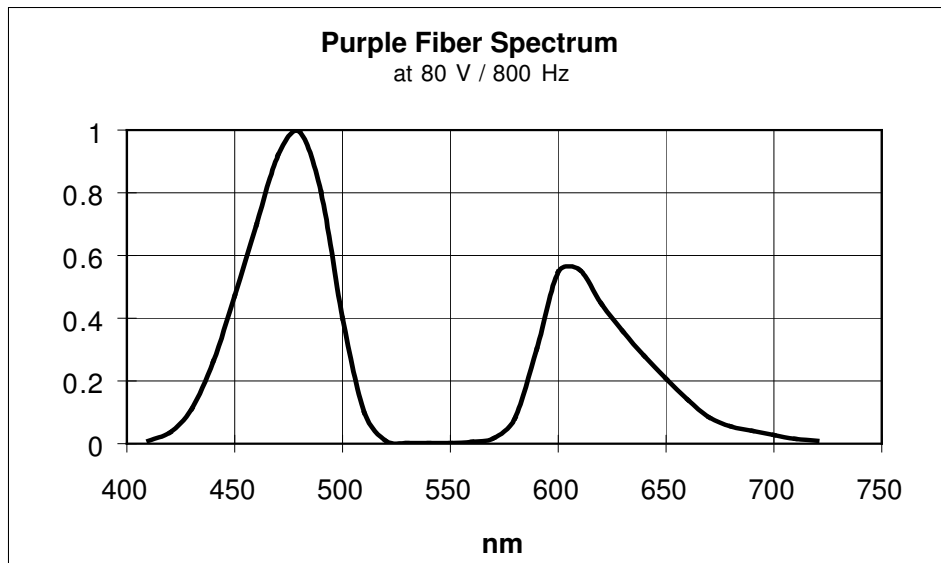

Typical** Initial Reference Brightness*** (nit)

Voltage, VRMS	400 Hz	800 Hz	2000 Hz	4000 Hz
40	0.7	1.2	2.2	3.2
50	1.5	2.5	4.5	6.8
60	2.5	4.2	7.6	11.3
70	3.7	6.1	11.2	17.0
80	5.0	8.5	15.5	23.7

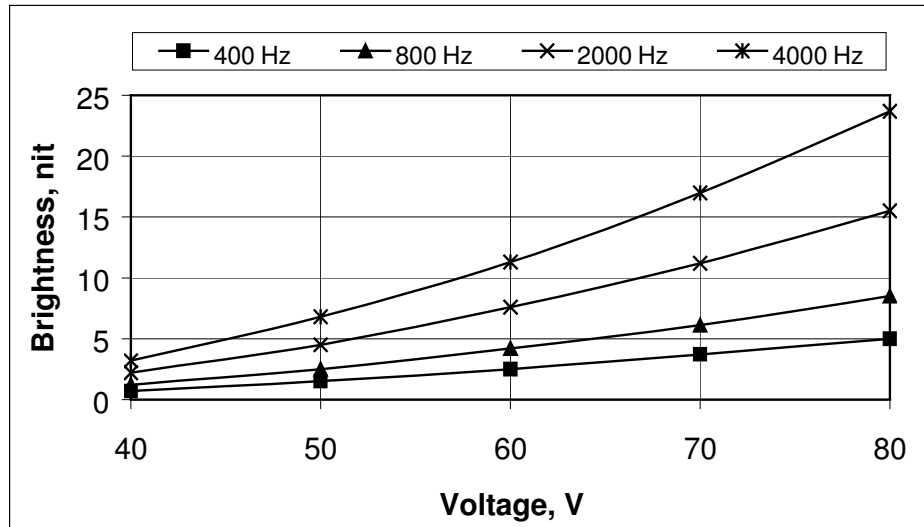

* Remark: Product intended for indoor use.

** Remark: Actual parameters of each lot may vary from typical values within +/-20%. All parameters shown for room conditions.

*** Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.85 mm.



ELAM Ltd

P.O.B. 45071, Jerusalem 91450, Israel

Phone: 972-2-532-8888

Fax: 972-2-532-8889



ELAM Ltd

P.O.B. 45071, Jerusalem 91450, Israel

Phone: 972-2-532-8888

Fax: 972-2-532-8889