


## Product Specification

### Hi-Bright Red EL Wire – Model 48S R1

Specific characteristics\*


#### Typical\*\* Chromaticity Coordinates

Voltage/Frequency	Chromaticity Coordinates	
	X	Y
80 V / 400 Hz	0.674	0.321
80 V / 800 Hz	0.676	0.322
80 V / 2000 Hz	0.678	0.322

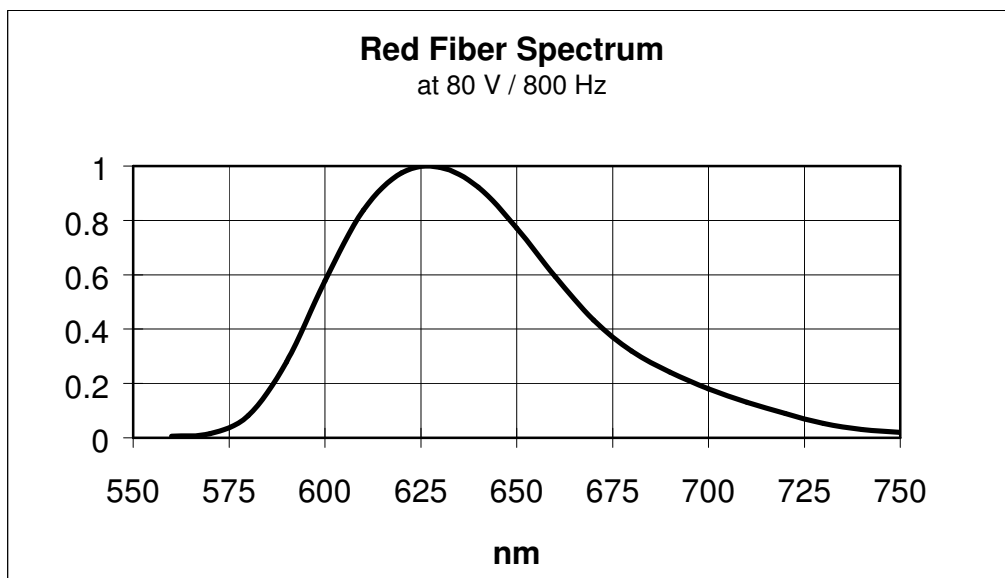

### Typical\*\* Initial Reference Brightness\*\*\* (nit)

Voltage, VRMS	400 Hz	800 Hz	2000 Hz	4000 Hz
40	1.8	3.0	5.0	7.5
50	3.5	5.5	10.5	15.5
60	5.5	9.5	17.5	26.5
70	8.5	14.0	26.0	40.0
80	11.5	19.5	35.5	54.5

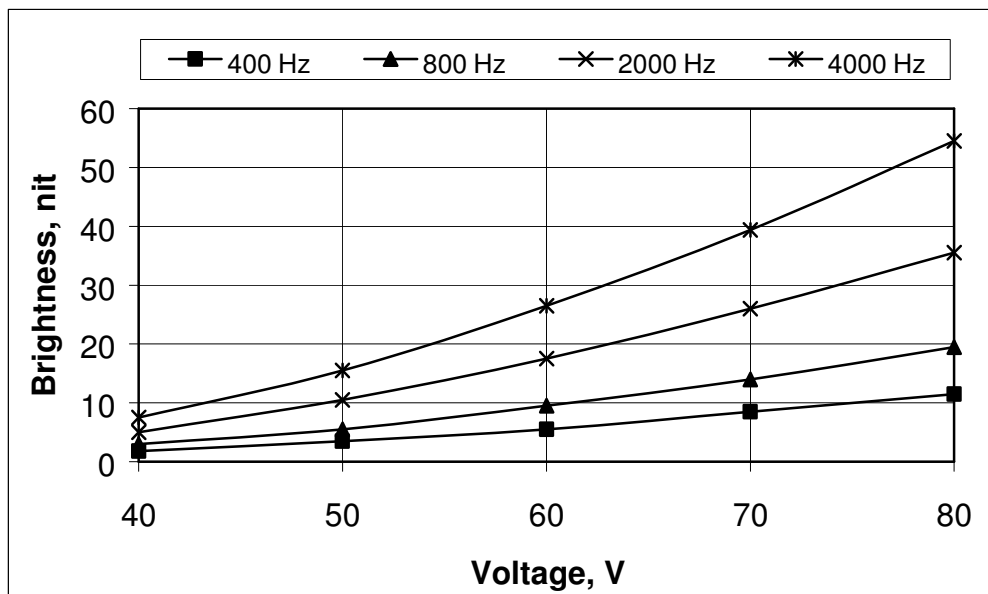

\* Remark: Product intended for indoor use.

\*\* Remark: Actual parameters of each lot may vary from typical values within +/- 20%. All parameters shown for room conditions.

\*\*\* Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.85 mm.



ELAM Ltd.  
P.O.B. 45071, Jerusalem 91450, Israel  
Phone: 972-2-532-8888  
Fax: 972-2-532-8889

\* Remark: Product intended for indoor use.

\*\* Remark: Actual parameters of each lot may vary from typical values within +/- 20%. All parameters shown for room conditions.

\*\*\* Remark: The mentioned reference brightness values are related to the light emitting electroluminescent layer having diameter of 0.85 mm.